

**DRIVER AND EVENT DETAILS**

Name

Date

Event

Weather

Result

**CHASSIS AND ELECTRICS**

Chassis

Top Deck Flex  Standard  Stiff

Bodyshell

Wing

E.S.C.

Servo

Receiver

Number of Cells 4  5  6

Type of Cells

**TRACK CONDITIONS**

Grip Level High  Medium  Low

Track Type Tight  Open  Both

Surface Carpet  Tarmac  Wood

Venue Indoor  Outdoor

Track Condition Smooth  Bumpy

Track Temperature °C  °F

**DRIVER NOTES****MOTOR AND GEARING**

Type Brushed  Brushless

Motor

Brush

Spring

Timing

Gear Pitch 48Dp  64Dp

Spur Size

Pinion Size

**WHEELS, TYRES AND INSERTS**

Wheels

Tyres

Inserts

Tyre Additive

Additive Time MIN (R)  MIN (F)

Tyre Warmers Yes  No

**FRONT SETTINGS**

Drive Diff  Spool  One-Way  Height High  Low

Servo Saver Yes  No

Toe In-Out In-board  Out-board  ° Toe-out

Screw Block Spacers Front mm Rear mm

Wishbone Quik-Klips Front mm Rear mm

Link Washers (Horizontal) mm

Ride Height (Chassis to Floor) mm

Droop (Chassis to Floor) mm

Anti-roll Bar Yes  No  1.20  1.40  1.60

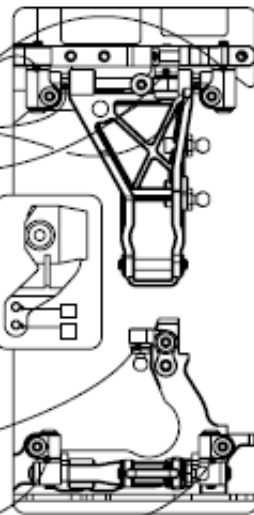
Castor 0°  2°  4°  6°

Camber Positive  Negative  Deg

Link Washers (Vertical) mm

Inboard Pin Kick-up  Anti-dive  Horizontal

Pivot Block Spacers Front mm Rear mm

**Front Shocks**

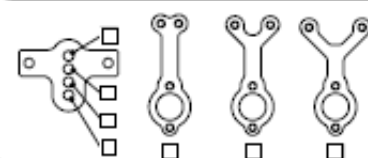
Oil  WT

Springs

Piston Holes 2  3

length

Rebound %

**Centre Track Rod****REAR SETTINGS**

Drive Height High  Low

Toe In In-board  ° Out-board  °

Screw Block Spacers Front mm Rear mm

Wishbone Quik-Klips Front mm Rear mm

Link Washers (Horizontal) mm

Ride Height (Chassis to Floor) mm

Droop (Chassis to Floor) mm

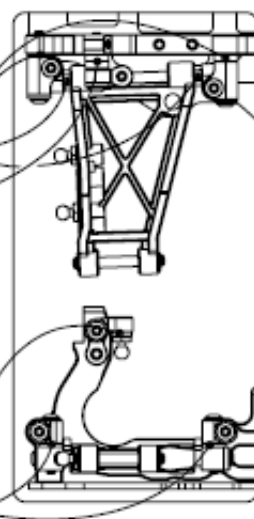
Anti-roll Bar Yes  No  1.20  1.40  1.60

Camber Positive  Negative  Deg

Link Washers (Vertical) mm

Inboard Pin Pro-Squat  Anti-Squat  Horizontal

Pivot Block Spacers Front mm Rear mm

**Rear Shocks**

Oil  WT

Springs

Piston Holes 2  3

length

Rebound %

**Driver Notes**